Enclosed Tray Delivery Cart

D Series - End Loaded

Specifications

- Stainless steel is nickel-bearing, 200 series minimum. This material is NSF recognized for corrosion resistance.
- Accommodates 10 or 20 each, 14" x 18" or 15" x 20" travs, end loaded one per ledge.
- Door opens a full 270 degrees for unobstructed access and contains a hold open device.
- Paddle door latch assures positive door closure.
- · Recessed vertical push handles on both ends of the double component model and on the rear of the single compartment model.
- Cart body and removable stainless steel tray slides are easily cleaned and sanitized.
- Compartment floor drain facilitates interior cleaning.
- Perimeter bumper protects walls, furnishings and doors.
- Space saving narrow design.
- 18 gauge stainless steel body and doors.
- 16 gauge stainless tray slide with 14 gauge uprights.
- 16 gauge bottom and top.
- Please contact our facility at 615-895-5333 with inquiries for custom tray sizes, capacities, and ledge spacing.



High-value stainless steel and aluminum equipment





Model D10TC1520



Enclosed Tray Delivery Cart D Series - End Loaded




Model D20TC1520

Customization is available

Dimensions - Examples of Previous Models

Model	Tray Capacity		Ledge Spacing	# of Interior Compart- ments	Overall Size			Casters		Shipping Weight	Case Cube
					W	D	Н	Туре	Dia.	lbs.	Cu. ft.
D10TCEL	10 ea.	14"x18" or 15"x20"	5"	1	32 3/4"	23 1/8"	60 3/4	2 swivel, 2 fixed	6"	260	38.6
D20TCEL	20 ea.	14"x18" or 15"x20"	5"	2	44 3/4"	23 1/8"	60 3/4	4 swivel, 2 fixed	6"	415	50.7

Drawings

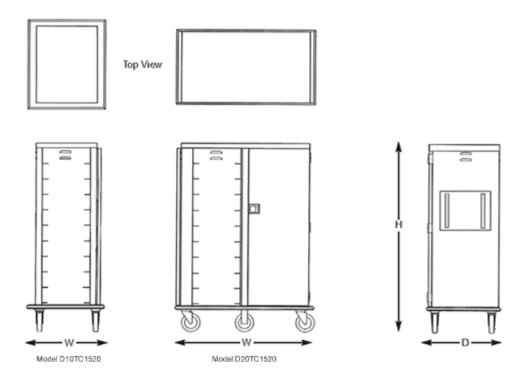

© 2011 Alliance Products, LLC 820 Esther Lane | Murfreesboro, TN 37129 615.895.5333 phone 615.895.5334 fax